

Kubota



KUBOTA DIESEL RIDE-ON MOWER

GR

GR2120

A sleek and stylish ride-on mower loaded with professional features, the GR2120 gives you first class results every time.

NEW



Introducing a revolutionary technology

GLIDE STEER

Easy to use, comfortable to operate and a pleasure to look at, the Kubota GR2120 is unrivalled for professional results.


Results, results, results. If that's what you're looking for there's no better choice than the GR2120. This high-end ride-on boasts our unique Glide Steer, an innovative Direct Chute System, a 21-horsepower engine, and a newly designed grass collector. Test drive the GR2120 today and experience unmatched performance in both efficiency and final finish.

Performance

The brain and brawn to tackle the toughest tasks.

Glide Steer

This revolutionary technology enables the GR2120 to turn so sharply, it leaves only a 100 cm circle of uncut grass. Our unique Glide Steer feature makes cutting around trees, poles, and other narrow objects extremely efficient. Plus, because the inner rear wheel spins freely when turning, the grass is not damaged.

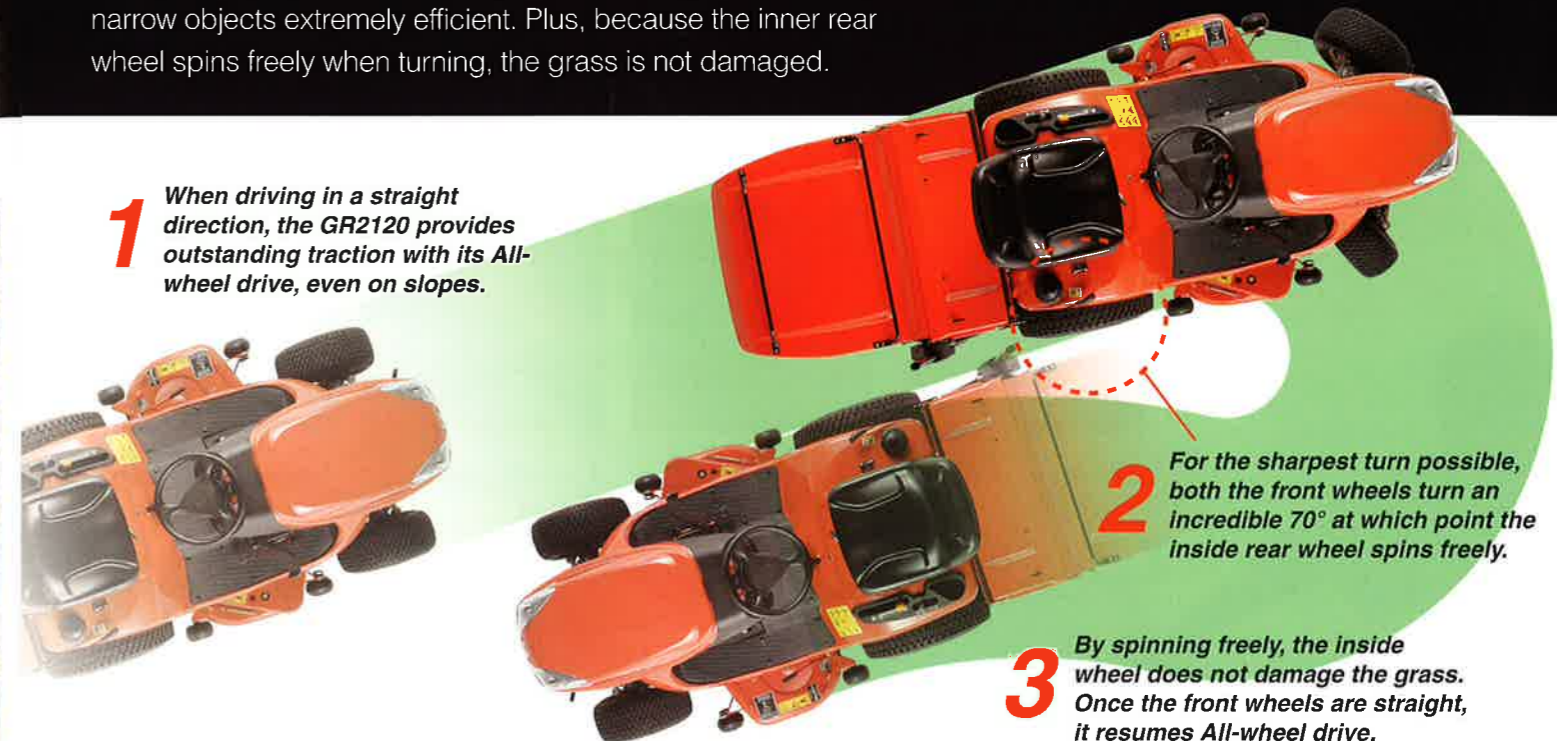

Powerful Kubota engine

Tapping Kubota's legendary heritage of formidable engine designs, the GR2120 is equipped with a 21-horsepower, 3-cylinder diesel power plant. It generates a high torque rise that easily handles hours of heavy-duty mowing, even in long, wet grass, with a grass collector mounted.



Ultra-durable shaft drive

Unlike the belt-drive system utilised in gasoline mowers, our shaft-drive transmission, shaft-drive PTO, and hydraulic PTO clutch are incredibly durable and worry-free.



Fatigue-reducing power steering

Feather-touch power steering enhances manoeuvrability, reduces fatigue, and makes operating the GR2120 possible for virtually anyone.

Versatile HST transmission

Kubota's reputable and versatile HST transmission is easily controlled by a single foot pedal and produces a maximum travel speed of 10km/h.

Suspension seat/full-flat deck

Oversized and generously padded, the GR2120's parallel linkage suspension seat can be adjusted to provide a high level of comfort to a wide range of operators. Its full-flat deck minimises operator fatigue by offering plenty of legroom.

Turf

 Our Direct Chute System ensures professional results.

With our Direct Chute System's reputation for high performance, it was only natural to incorporate it within the GR2120. Unlike other 3-bladed, side-discharge mowers that utilise a turbine, the Direct Chute System efficiently cuts and channels grass straight back into an integrated rear grass collector. The deck's cutting width is an ample 48", and because there's no duct on either side, you can execute tight, tree-hugging turns in either direction.



Maintenance

The sophisticated grass collector design makes catching and dumping grass easy.

The grass collector on the GR2120 maintains a large capacity, yet, is lighter, easier to empty and utilises innovative mower technologies to prevent clogging.

Large capacity grass collector

The 450-litre grass collector has been made lower and longer to minimise clogging and reduce time between dumping. The collector also boasts lighter materials for easier handling.



Collector lever and lid

A gas-spring assist mechanism on the collector lever used for dumping makes lifting, even a full basket, easy. The lid of the collector opens wide, making maintenance easy work.



Well-designed duct

A handy electronic sensor is added to signal when the collector needs to be emptied. The wide duct leading from the mower deck is designed to move grass smoothly. A lever on the side of the tractor allows the operator to expel excess grass from the duct without leaving the tractor seat.



Easy reach cutting height adjustment dial



Deck cleaning pipe for connecting water hose



Hydraulic mower lift lever



Ultra-durable, long-life hexagonal belt



Rear Deflector

An optional rear deflector is available for times when you choose not to use the grass collector. This deflector discharges grass and dust directly onto the ground and easily attaches to the end of the duct, which leads from the mower deck.

Specifications

| | | |
|--|---|--------------|
| Model | GR2120 | |
| Engine | Kubota D782-E3-GX | |
| Model | 3 cylinder, diesel, water-cooled | |
| Type | 3 cylinder, diesel, water-cooled | |
| Total displacement | cc | 778 |
| Gross horsepower | HP (kW) | 21.0 (15.6) |
| Engine layout | Horizontal | |
| Fuel tank capacity | ℓ | 18 |
| Dimension | | |
| Overall length | mm | 2880 |
| Overall width | mm | 1280 |
| Overall height | mm | 1230 |
| Wheelbase | mm | 1280 |
| Tread | | |
| Front/Rear | mm | 825/800 |
| Weight (w/mower and grass collector) | kg | 515 |
| Tyre size | | |
| Front/Rear | 16×7.5–8/23×10.50–12 | |
| Transmission | Hydrostatic transmission | |
| Transmission drive | Shaft drive | |
| Speed control | Single foot pedal | |
| Front-wheel drive | Glide Steer | |
| Travelling speed | | |
| Forward/Reverse | km/h | 0–10.0/0–5.0 |
| Brake | Internal expanding brake | |
| PTO clutch | Hydraulic wet multi discs | |
| Mower deck drive | U-joint shaft | |
| Steering system | Glide Steer, fully hydraulic power steering | |
| Operator's deck | Flat | |
| Seat adjustment | Slide | |
| Seat suspension | Parallel linkage | |
| Fuel gauge | Std. | |
| Hour meter | Std. | |
| Easy checker | Std. | |
| Mower OPC. | Std. | |
| Travel OPC. | Std. | |
| Blade shut off brake | Built-in clutch | |
| Mower shut off when collector open | Std. | |
| Grass collector | | |
| Capacity | ℓ | 450 |
| Dumping system | Manual | |
| Material of bag | Fabric / Steel | |
| Optional accessories & implements | Cruise control, rear deflector | |

Mower Specifications

| | | |
|------------------------------------|---|----------|
| Cutting width | inch. (cm) | 48 (122) |
| Mower system | Direct chute | |
| Mower blade drive | V./hexagonal belt | |
| Lifting device | Hydraulic | |
| Mower mounting method | Quick attach | |
| Cutting height | mm | 25–102 |
| Cutting height adjustment | Dial | |
| Cutting height position | 11 | |
| Number of blades | 3 | |
| Direction of rotation | 2 clockwise viewed from operator, 1 counter clockwise | |
| Minimum uncut diameter | m | 1.0 |
| Mower deck ground clearance | mm | 135 |

The company reserves the right to change the above specifications without notice.

©2011 Kubota Corporation



KUBOTA (U.K.) LIMITED

Dormer Road Thame, Oxfordshire, OX9 3UN.
Phone Thame (01844) 214500 Fax (01844) 216685
E-mail: sales@kubota.co.uk

Web site: <http://www.kubota.co.uk>